

Luces de Trabajo

Todos los productos de iluminación LED están diseñados para uso industrial.

Modelo: P2020i

Diseño compacto, rendimiento poderoso

Luz aftermarket (repuesto)

Sustituto exacto para la luz de la serie 8 nueva
Ref: 56590-36760-71

Incluye soporte de montaje universal

Ventajas


Aproximadamente 90% más económica que la original (O.E.M.)

Ingenieros mejoraron la cobertura de luz


Multi-voltaje (12-48 V)

Incluye soporte universal opcional, compatible con cualquier montacargas

Instalación rápida y segura con imanes industriales de alta resistencia, sin perforación

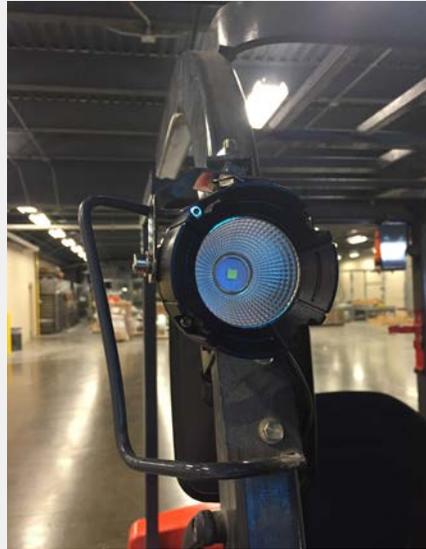


P2020i en soporte de luz serie 8

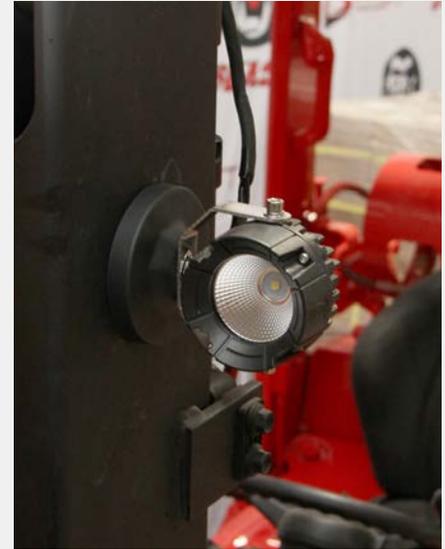


P2020i en montaje con imán universal

THUP2020I

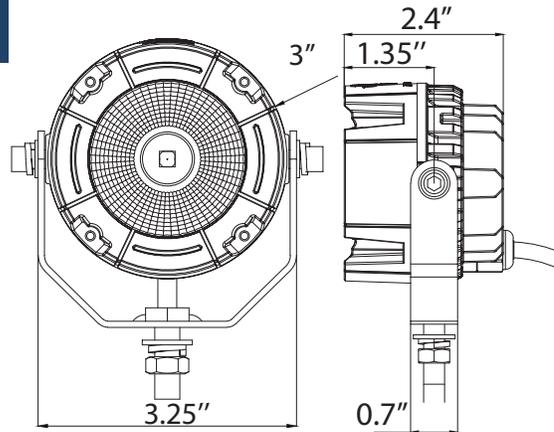


 10 - 80 VOLTAGE	 1600 LUMEN	 12 W OUTPUT
 1 LED	 IP67 RATING	 20G SHOCK RESISTANT
 -40C TO 65C TEMP RANG	 ALUMINUM HOUSING	 UNIVERSAL MOUNTING

THUP2025

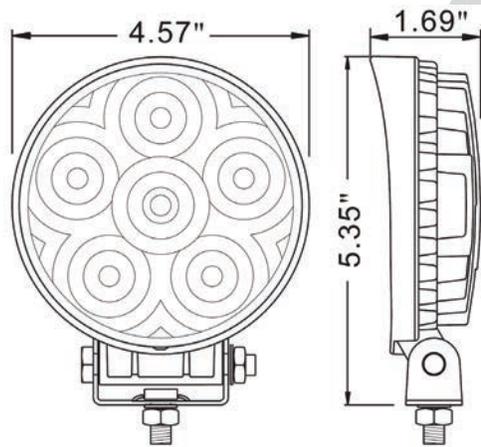


		
10 - 30 VOLTAGE	1350 LUMEN	18 W OUTPUT
		
6 LEDS	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP2027

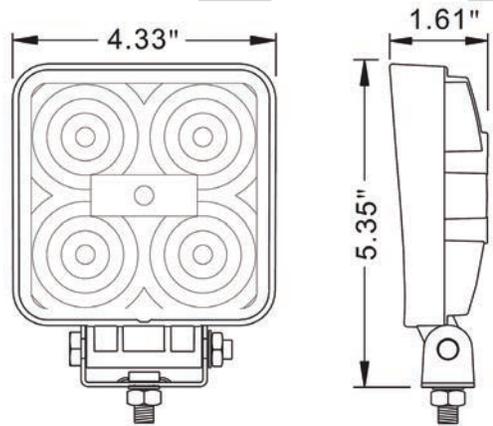


		
10 - 30 VOLTAGE	1050 LUMEN	15 W OUTPUT
		
5 LEDS	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP2030

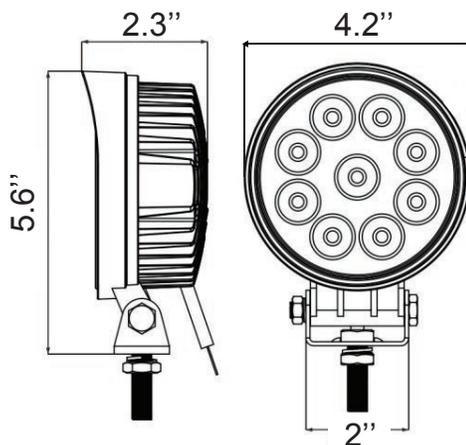


		
10 - 80 VOLTAGE	1800 LUMEN	27 W OUTPUT
		
9 LEDS	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP2040

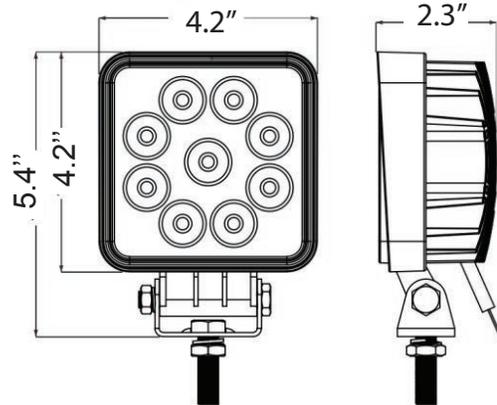


		
10 - 80 VOLTAGE	1800 LUMEN	27 W OUTPUT
		
9 LEDS	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP4010

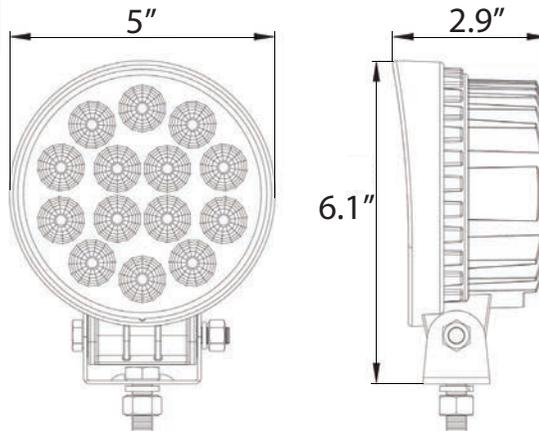


		
10 - 48 VOLTAGE	3080 LUMEN	42 W OUTPUT
		
14 LEDS	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP4020

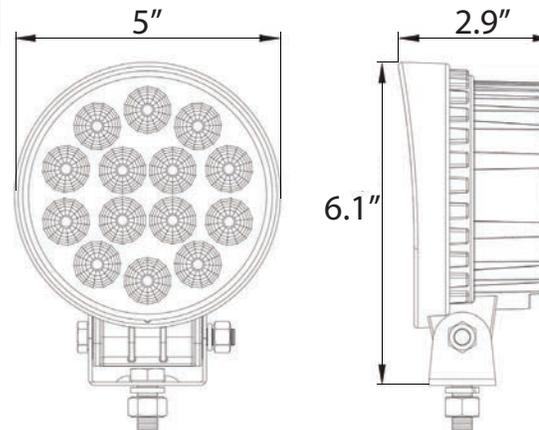


		
10 - 48 VOLTAGE	3080 LUMEN	42 W OUTPUT
		
14 LEDS	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP4030

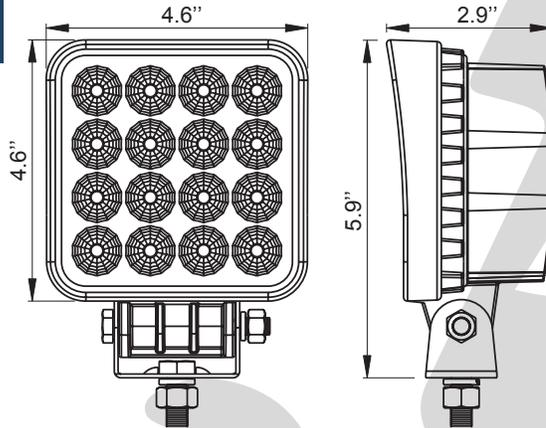


		
10 - 48 VOLTAGE	3520 LUMEN	48 W OUTPUT
		
16 LEDS	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP4040

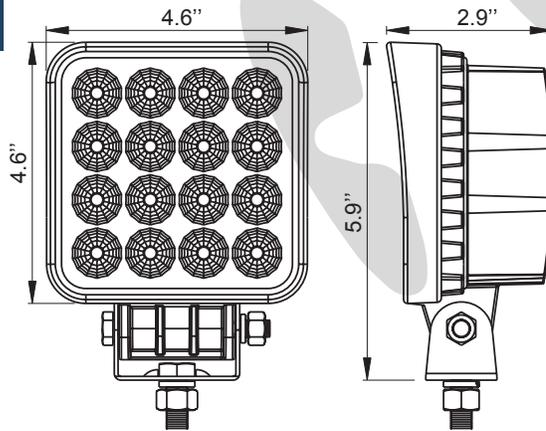


		
10 - 48 VOLTAGE	3520 LUMEN	48 W OUTPUT
		
16 LEDS	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP4050

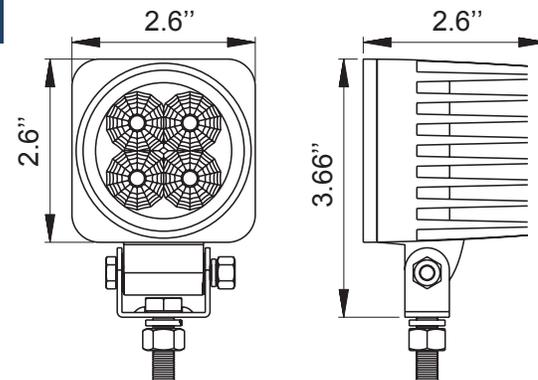


		
10 - 48 VOLTAGE	880 LUMEN	12 W OUTPUT
		
4 LEDS	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP6060

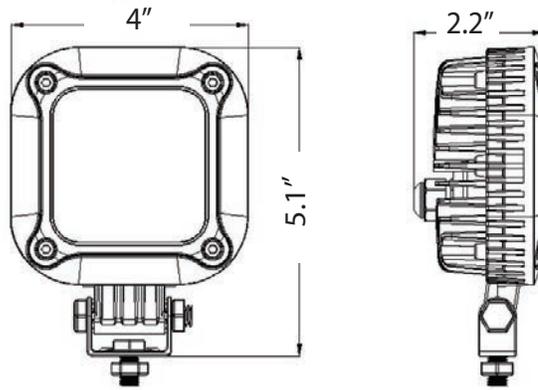


 10 - 48 VOLTAGE	 900 LUMEN	 15 W OUTPUT
 5 LEDS	 IP67 RATING	 20G SHOCK RESISTANT
 -40C TO 65C TEMP RANG	 ALUMINUM HOUSING	 UNIVERSAL MOUNTING

THUP6061

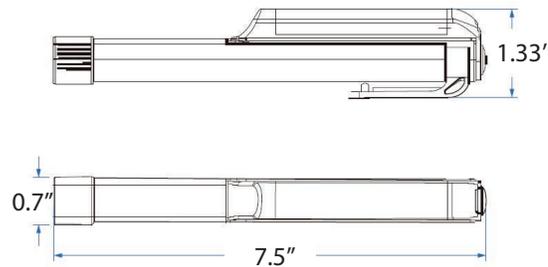


 BATTERY: 3PCS * AAA	 1 LED	 3 W OUTPUT
 -40C TO 65C TEMP RANG	 IP67 RATING	 20G SHOCK RESISTANT

THUP6062

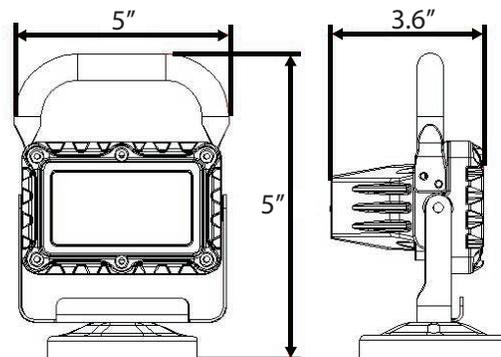


 5 VOLTAGE	 540 LUMEN	 9 W OUTPUT
 3 LEDS	 IP67 RATING	 20G SHOCK RESISTANT
 -40C TO 65C TEMP RANG	 ALUMINUM HOUSING	 UNIVERSAL MOUNTING

THUP6063

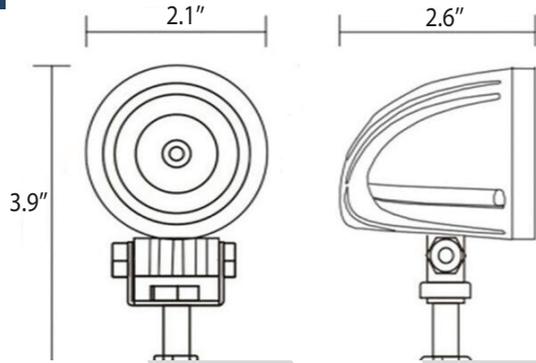

		
10 - 48 VOLTAGE	400 LUMEN	5 W OUTPUT
		
1 LED	IP67 RATING	20G SHOCK RESISTANT
		
-40C TO 65C TEMP RANG	ALUMINUM HOUSING	UNIVERSAL MOUNTING

THUP7070

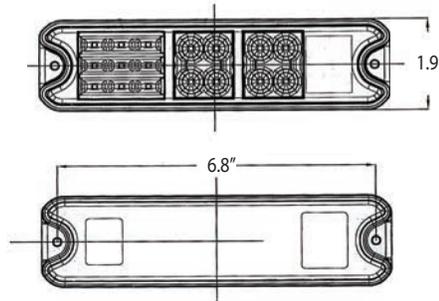

		
10 - 48 VOLTAGE	14 LEDS	28 W OUTPUT
		
-40C TO 65C TEMP RANG	IP67 RATING	20G SHOCK RESISTANT
		
		PLASTIC HOUSING



ventas@thunderledlights.com.mx



Torreón 514, Chapultepec, 66450
San Nicolás de los Garza, N.L.



www.thunderledlights.mx



(81) 1768 7091